


XPP-5420B

Intrinsically Safe Permissible Flashlight

MARKET APPLICATIONS	Hazardous work environments, industrial, automotive, law enforcement, fire & rescue
DESCRIPTION	This non-rechargeable flashlight is cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible. It uses a CREE® LED rated at 140 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 180 meters. The single body switch provides momentary or constant-on functionality. Power comes from 3 AA premium batteries (not included).
CASE MATERIAL	Engineered Polymer - Black
DIMENSIONS	Length: 7.0 inches (178 mm) • Head Diameter: 1.8 inches (46 mm) • Handle Diameter: 1.0 x 1.5 inches (25 x 38 mm)
WEIGHT	Weight: 7.3 oz. (207 g) with batteries installed
LENS	Unbreakable polycarbonate with scratch resistant coating
LIGHT SOURCE	Flashlight: CREE® LED Impervious to shock with a 50,000 hour lifetime
LIGHT OUTPUT	140 lumens
ON/OFF	Single Body Switch - Momentary or Constant-on Flashlight
RUN-TIME	10 hours
BATTERY	3 Alkaline AA batteries (not included)
FEATURES	<ul style="list-style-type: none"> • cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible • CREE® LED technology – 50,000 + hours LED life • Momentary or constant-on flashlight • Sharp focused beam for distance illumination • Engineered polymer housing • Non-slip grip • Single body switch • Waterproof • Impact & chemical resistant • Built-in pocket/belt clip • Includes removable lanyard • Requires 3 AA batteries

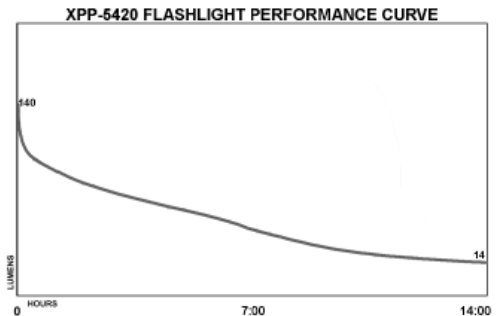

WARRANTY Limited Lifetime Warranty • Includes the LEDs, housing and lenses. Rechargeable batteries, chargers, switches, electronics and included accessories are warranted for a period of two years with proof of purchase. Disposable, non-rechargeable batteries are excluded from this warranty. Normal wear and failures which are caused by accidents, misuse, abuse, faulty installation and lightning damage are also excluded.

APPROVALS



FL 1 STANDARD

 140 LUMENS	 14h	 180m
 7500cd	 2m	 1m

Permissible Nightstick 5420 Flashlight

MSHA APPROVAL No. 20-A130001-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.
 2) Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types.
 3) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.
 4) The Model Nightstick 5420 must not be opened in areas where permissibility is required.

 Intertek ID 4003544 INTRINSICALLY SAFE SECURITE INTRINSEQUE	CLASS I DIV 1 GRPS A-D T3 CLASS II & III DIV 1 GRPS E-G T135C CLASS I ZONE 0 AEx ia IIC T3 Ga CLASS I ZONE 0 Ex ia IIC T3 Ga Ⓢ I M 1 Ex ia I Ma Ⓢ II 1 G Ex ia IIC T3 Ga	Ex ia I Ma Ex ia IIC T3 Ga Intertek ITS 13 ATEX27837X IECEx ETL 13.0026X -20°C ≤ Tamb ≤ +40°C 1.5V/Cell AA Alkaline
--	---	--

CE 0359

Conforms to: ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26	Certified to: CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25
--	--