

XPP-5454GC


Intrinsically Safe Multi-Function Dual-Light™ Headlamp w/ Hard Hat Clip

MARKET APPLICATIONS	Hazardous work environments, industrial, automotive, law enforcement, fire & rescue
DESCRIPTION	This non-rechargeable Multi-Function Dual-Light™ Headlamp w/ Hard Hat Clip is cETLus, ATEX and IECEx listed Intrinsically Safe. This headlamp features a multi-position tilt head design and includes an integrated Stainless Clip for attachment to most hard hat mounting brackets. The dual top mounted switches provide user-selectable high or low-brightness spotlight, high or low-brightness floodlight operation and our exclusive Dual-Light design...the ability to turn on both the spotlight and the floodlight at the same time for maximum user safety and lighting versatility.
CASE MATERIAL	Engineered Polymer - Green
DIMENSIONS	Width: 2.6 inches (66 mm) • Height: 2.1 inches (53 mm) • Depth: 1.8 inches (46 mm)
WEIGHT	Weight: 3.4 oz. (97 g) with batteries installed
LENS	Unbreakable polycarbonate with scratch resistant coating
LIGHT SOURCE	CREE® LED Impervious to shock with a 50,000 hour lifetime
LIGHT OUTPUT	High-Brightness Spotlight: 100 lumens • Low-Brightness Spotlight: 60 lumens • High-Brightness Floodlight: 90 lumens • Low-Brightness Floodlight: 50 lumens • Dual-Light: 115 lumens
ON/OFF	Dual Switches. High/Low Spotlight, High/Low Floodlight, Dual-Light
RUN-TIME	High-Brightness Spotlight: 5 hours • Low-Brightness Spotlight: 13.5 hours • High-Brightness Floodlight: 4.25 hours • Low-Brightness Floodlight: 13.75 hours • Dual-Light: 3.5 hours
BATTERY	3 Alkaline AAA batteries (included)
FEATURES	<ul style="list-style-type: none"> • cETLus, ATEX and IECEx listed Intrinsically Safe • CREE® LED technology – 50,000 + hours LED life • High/low-brightness spotlight – high/low-brightness floodlight – Dual-Light™ • Integrated Stainless Steel Clip for use with most hard hat mounting brackets • Focused spotlight beam for distance illumination • Unfocused wide-beam floodlight for close-up illumination • Dual-light (any spotlight & floodlight mode at same time) for maximum versatility • Engineered polymer housing • Dual switches located on top of light • Adjustable ratchet tilt head • Waterproof • Impact & chemical resistant • Powered by 3 AAA batteries (included)

FL 1 STANDARD	HIGH	LOW
	115 LUMENS	60 LUMENS
	5h	16h 15min
	82m	60m
	1668cd	882cd
	2m	
	1m	

WARRANTY Limited Lifetime Warranty • Includes the LEDs, housing and lenses. Rechargeable batteries, chargers, switches, electronics and included accessories are warranted for a period of two years with proof of purchase. Disposable, non-rechargeable batteries are excluded from this warranty. Normal wear and failures which are caused by accidents, misuse, abuse, faulty installation and lightning damage are also excluded.

APPROVALS

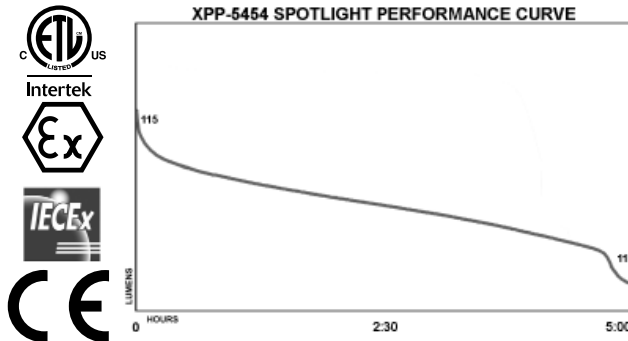

Nightstick 5454GC Headlamp

ID 4008947
INTRINSICALLY SAFE
SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T3	Ex ia IIC T3 Ga
CLASS II & III GRPS E-G T135C	Intertek ITS 13 ATEX27928X
CLASS I ZONE 0 AEx ia IIC T3 Ga	IECEx ETL 13.0045X
CLASS I ZONE 0 Ex ia IIC T3 Ga	-20°C ≤ Tamb ≤ +40°C
Ⓜ II 1 G Ex ia IIC T3 Ga	1.5V/Cell AAA Alkaline

CE 0359

Conforms to:	Certified to:
ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26	CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25