

ULTIMA® X5000



WE KNOW YOU'RE TIRED OF...



*"NEEDING TO DISCONNECT POWER
BEFORE CHANGING A SENSOR"*

*"REMEMBERING HOW TO
CALIBRATE THIS THING"*

*"HAVING TO PULL SO MUCH WIRE AT
EVERY GAS DETECTOR INSTALLATION..."*

*"WONDERING IF THE GAS DETECTOR
IS WORKING"*




*YOU HAVEN'T BEEN ABLE
TO DO ANYTHING ABOUT IT..
UNTIL NOW*

*"LOSING MY
MAGNET... I HAVE
BIGGER THINGS TO
WORRY ABOUT"*



ALL NEW DESIGN

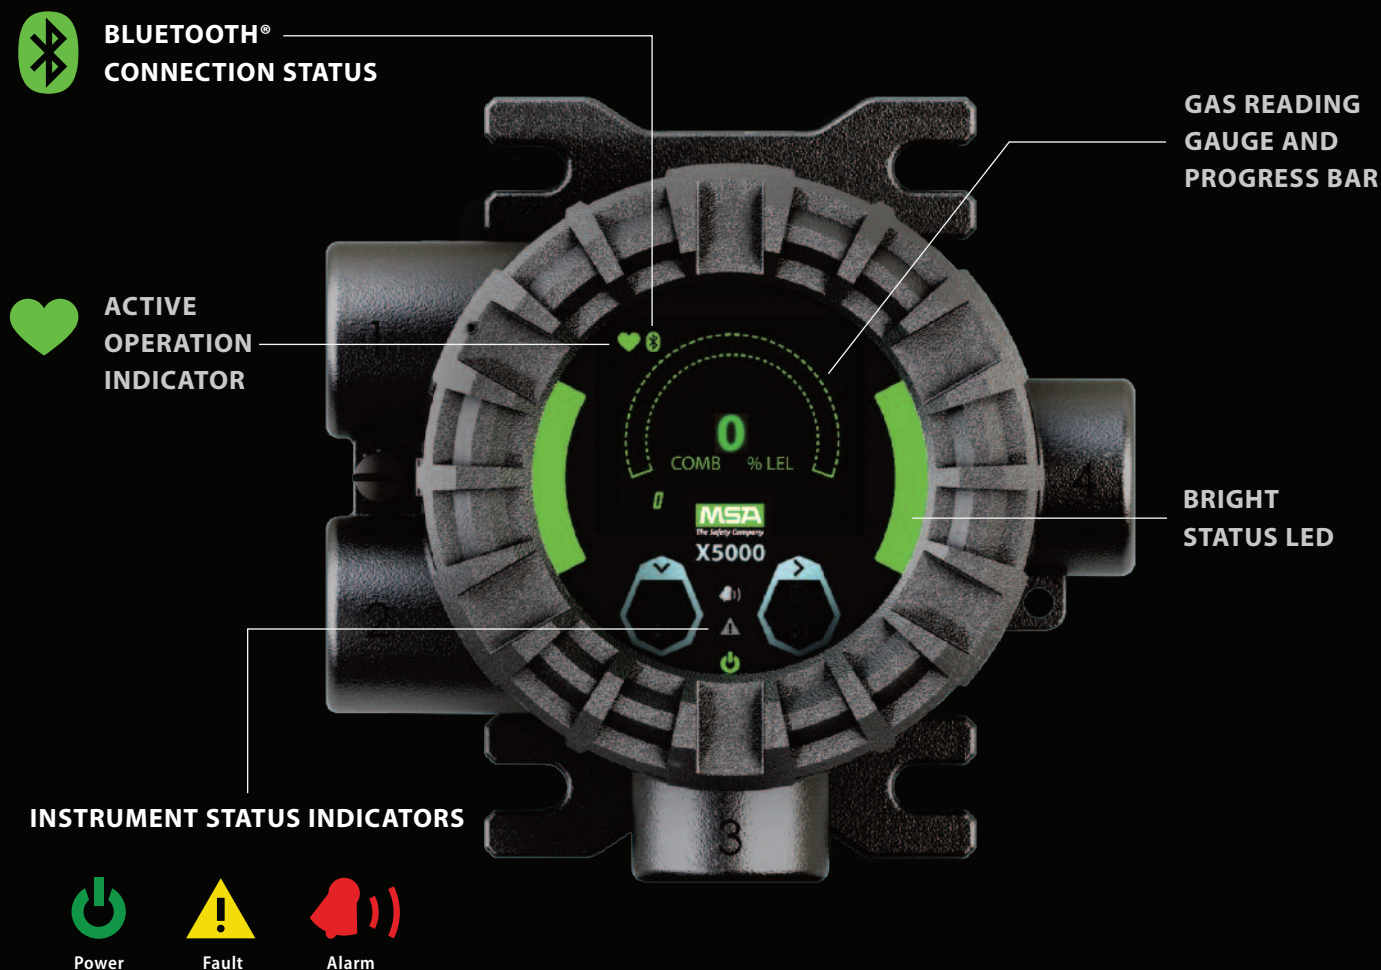


STAY CONNECTED. WORK SMARTER.

- Bluetooth wireless technology
- Check status and get alerts up to 75 ft (23 m) away
- Modify settings/setpoints/alarms
- Initiate calibration and view progress
- Reduce setup time by at least 50%



Do MORE WITH LESS

1 Transmitter = 2X Sensing Power

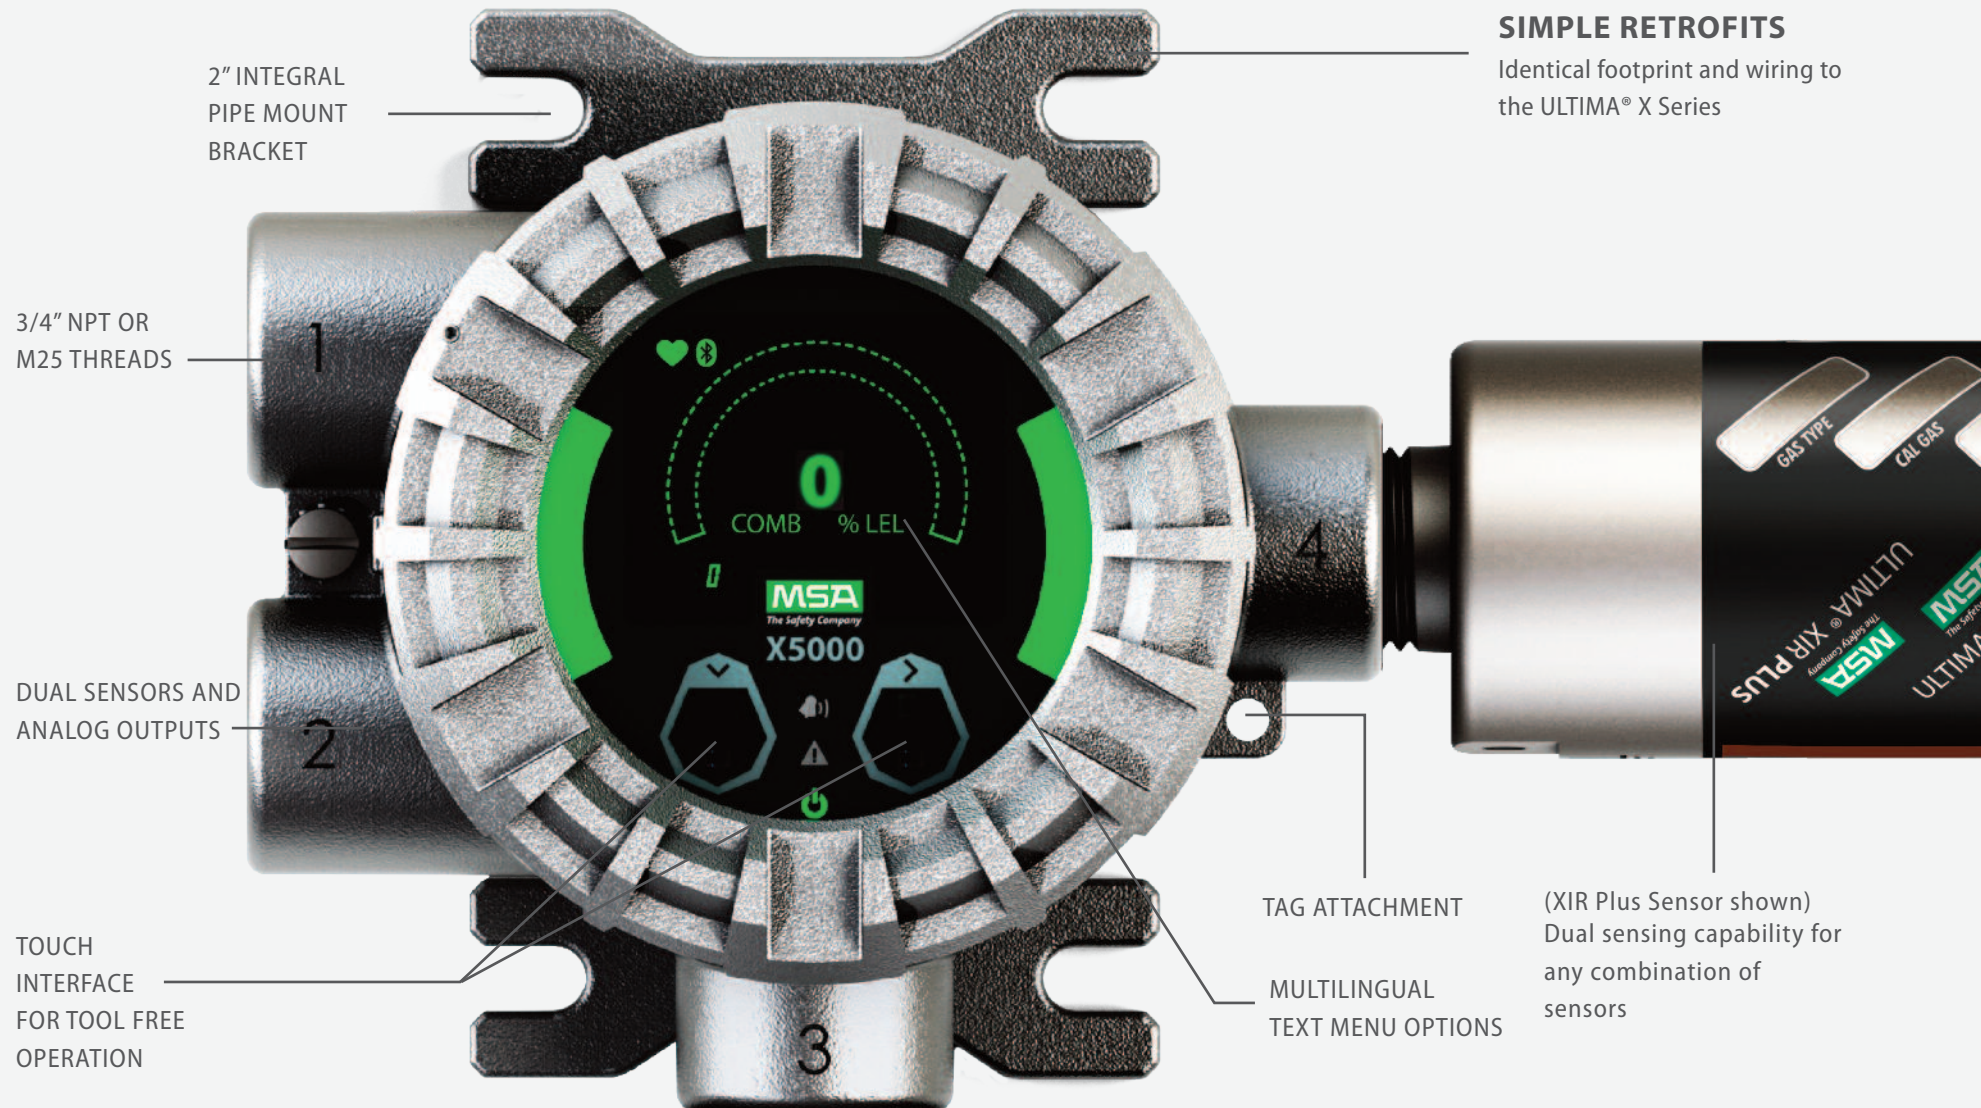

Combustible, Toxic
or Oxygen
Digital Sensors

POWERED BY

XCell[®]
SENSORS

WITH

TruCal[®]
PLATFORM



(ACTUAL SIZE)

SafeSwap[®]

Safely and quickly replace
sensors without turning off
the instrument

MATERIAL OPTIONS



STAINLESS STEEL
Ultra Corrosion
Resistant
8.8 lbs

NEW ADVANCED SENSOR TECHNOLOGY

Up to 1.5 YEARS between calibrations!

XCell[®]
SENSORS

MSA Industry Avg

Longer Sensor Life


O₂



Toxic
(CO/H₂S)



Longer Warranties



Higher Temperature



10x Better Resolution for H₂S




TruCal[®]
TECHNOLOGY

*only CO & H₂S XCell Sensors

MSA Industry Avg

Better Stability (Lower Drift)

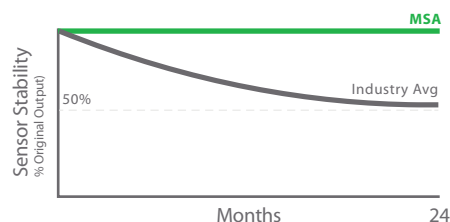

Longer Calibration Cycles



Worry-Free Operation



Automatically self-checks 4x/day

* Data may vary for different gases and configurations


IT MAKES SENSE...NO EXCEPTIONS



EXPECTED LIFE



WARRANTY



PATENTS

We're going to help you save*


Installation	30%	~\$7,000
Annual Maintenance	50%	~\$1,500
Over the life of the product	75%	~\$15k

* Based on 10 sensors and 2 sensors/transmitter

Questions about sensor placement?

MSA's new gas and flame mapping service combines 150 years of gas detection experience with 3D technology to help you maximize the effectiveness of every sensor.

Check out the link for more information:
<https://us.msasafety.com/gas-mapping>

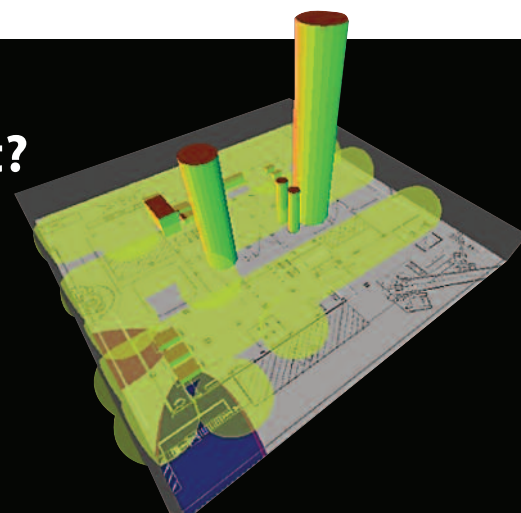

Trust us...We've been saving lives for over 100 years



ULTIMA X5000 Gas Monitor Specifications

PRODUCT SPECIFICATIONS			
COMBUSTIBLE GAS SENSOR TYPE	Catalytic Bead (XCell Comb) Infrared (XIR PLUS)		
TOXIC GAS & OXYGEN SENSOR TYPE	Carbon Dioxide CO ₂ (XIR PLUS) Carbon Monoxide CO (XCell Toxic) Carbon Monoxide CO H ₂ -Resistant (XCell Toxic) Hydrogen Sulfide H ₂ S (XCell Toxic) Oxygen O ₂ (XCell O ₂)		
SENSOR MEASURING RANGES	Combustible: 0-100% LEL H ₂ S: 0-10, 0-50, 0-100 ppm CO ₂ : 0-2%, 0-5% Vol CO: 0-100, 0-500, 0-1000 ppm CO-H ₂ Resist: 0-100 ppm O ₂ : 0-25%		
TYPICAL SENSOR LIFE	5 years – XCell Sensors 10 years - infrared		
SENSOR PERFORMANCE*	T90 TYPICAL:	REPEATABILITY	ZERO DRIFT PER YEAR:
XIR PLUS	<2 sec.	+/- 1% LEL or Vol	<2% full scale
XCELL COMB	<30 sec.	+/- 1% LEL	<5% LEL
XCELL H ₂ S	<23 sec.	+/- 3%	<1% full scale
XCELL O ₂	<11 sec.	+/- 0.1% Vol	0.2% Vol
XCELL CO	<11 sec.	+/- 3%	<1% full scale
APPROVALS CLASSIFICATION	US Divisions Class I Div 1 Groups A-D, T5, Type 4X, IP66 Class II Div 1 Groups E-G, T6; Class III US Zones Class I Zone 1 AEx db IIC T5 Gb Class II Zone 21 AEx tb IIIC T85°C Db Global Zones Ex db IIC T5 Gb Ex tb IIIC T85°C Db		
WARRANTY	X5000 Transmitter: 2 years XIR PLUS: 10 years source, 5 years electronics XCell Sensors: 3 years		
APPROVALS	CSA, ATEX, IECEx, CE Marking. Complies with C22.2 No. 152, FM 6320 RED, FCC Suitable for SIL 2		
ENVIRONMENTAL SPECIFICATIONS			
OPERATING TEMPERATURE RANGE	XCell: -40°C to +60°C XIR PLUS: -40°C to +60°C (may differ by gas, see manual)		
STORAGE TEMPERATURE RANGE	-40°C to +60°C		
RELATIVE HUMIDITY NON-CONDENSING:	10-95% (XCell Toxics & O ₂) 0-95% (XCell Comb) 0-95% (XIR PLUS)		

* Typical response at standard temperature and pressure test conditions

Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products. Specifications subject to change without notice.




MSA Singapore
 MSA S.E Asia Pte Ltd
 35 Marsiling Industrial Estate Road 3,
 #04-01, Singapore 739257.
 Phone: +65 6350 4500
 Fax: +65 6350 4505
 Email: msa.singapore@MSAsafety.com

MSA Malaysia
 No.5, Jalan P4/8A, Crest Hill Industrial Park
 Bandar Teknologi Kajang, Semenyih
 43500 Selangor
 Malaysia
 Phone: +603 8724 8208/9208
 Fax: +603 8724 2208

ID 0720-175-MC / Feb 2018

© MSA 2017 Printed in U.S.A.

MECHANICAL SPECIFICATIONS	
INPUT POWER	10 to 30 VDC, 3 wire, <5W nominal
SIGNAL OUTPUT	Dual 4-20 mA current source, HART
BLUETOOTH OPTIONAL:	Bluetooth Low Energy (BLE) v4.3 or higher
RELAY RATINGS	5A @ 30VDC; 5A @220 VAC (3X) SPDT – fault, warn, alarm
RELAY MODES	Common, discrete, horn
NOMINAL MAX POWER 9W/ RELAYS:	XIR PLUS 6.7W XCell Comb 5.5W XCell Toxic & O ₂ 2.8W XIR PLUS and XCell Comb 9.6W XIR PLUS and XCell Toxic & O ₂ 7.0W Dual XIR PLUS 11.6W Dual XCell Toxic & O ₂ 3.6W Dual XCell Comb 10.6W Dual XCell Comb and XCell Toxic & O ₂ 5.5W
EMC DIRECTIVE	Complies with EN 50270, EN 61000-6-4, EN 61000-6-3
DISPLAY	Organic LED (multi-lingual) with Contrast Ratio of 2000:1 and View Angle of 160°
HART	HART 7, HART device description language available
FAULTS MONITORED	Low supply voltage, RAM checksum error, flash checksum error, EEPROM error, internal circuit error, relay, invalid sensor configuration, sensor faults, calibration faults, general system
WIRING REQUIREMENTS	3-wire (single sensor) or 4-wire (dual sensor) shielded cable. Refer to manual for mounting distances and wire gauge.
DIMENSIONS	

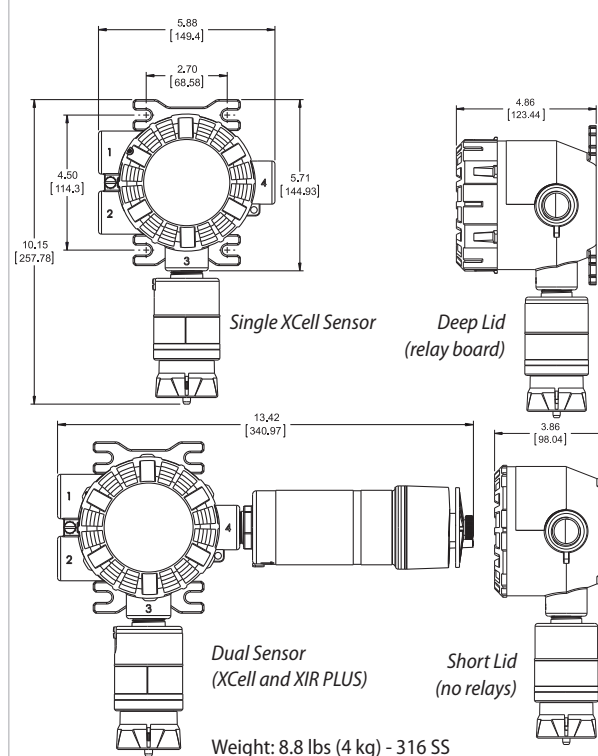

MSAsafety.com/detection